



WIRELESS G VoIP ADSL2+ MODEM ROUTER

2 INTERNET PHONE CONNECTIONS

2 FXS phone ports, 1 FXO line port for 2 simultaneous Internet phone & analog connections.

HIGH-SPEED WIRELESS INTERNET

Built-in ADSL2/2+ modem with up to 24Mbps downstream, 1Mbps upstream speed & 802.11g WLAN with up to 54Mbps wireless speed.

SECURELY SHARE NETWORK CONNECTION WITH A GROUP

Firewall protection, user access control, WPA/WPA2 wireless security, QoS VoIP/streaming multimedia & USB printer sharing – all from a single device



EVERYTHING YOU NEED FOR A HOME

Get everything from the D-Link DVA-G3671B Wireless G VoIP ADSL2+ Modem Router. This all encompassing device includes an integrated high-speed ADSL2/2+ modem, 2 VoIP phone connections, 802.11g wireless interface, a USB print server and a 4-port Ethernet switch. This router provides all the functions that your home needs to establish a fast, secure Internet connection, make and receive Internet calls, and wirelessly share the Internet link and USB printer with your family members.

FAST ADSL SPEED FOR CLEAR INTERNET PHONE

The DVA-G3671B provides ADSL2+ speeds of up to 24Mbps downstream and 1Mbps upstream, suitable for Internet phone calls. It combines the industry's latest Voice over IP technology with advanced communication features, and is compatible with industry-wise phone services. With two FXS phone ports and a FXO lifeline, this router can connect to two ordinary phone sets for two simultaneous phone calls, and relay phone calls to PSTN automatically in case of a power outage, so your phone line will always be available.

SECURE WIRED AND WIRELESS CONNECTION


The DVA-G3671B provides an integrated 802.11g WLAN supporting wireless speeds of up to 54Mbps, four Ethernet ports to connect to four computers through the network cables, and a USB port to hook up a printer and share it among the workgroup. It provides WEP data encryption and WPA/WPA2 wireless security, Stateful Packet Inspection (SPI) firewall protection, MAC/IP/Port access filtering access, and day/time parental control. Priority queues and packet prioritization enable your home to experience smooth VoIP and streaming media without concern of traffic congestion.

WHAT THIS PRODUCT DOES

This all-in-one DVA-G3671B router provides everything from a single box. Connect it to your phone wires, and you can establish a high-speed ADSL2+ line and make phone calls anywhere in the world using the Internet. This router lets a group of users surf the web and two people make Internet phone calls at the same time. It has a built-in 802.11g wireless interface and four LAN ports, so family members can connect to the network wirelessly or through the network cables. A USB port allows you to share your printer and print out web pages with your family.

CLEAR, SMOOTH VOICE OVER THE INTERNET

The DVA-G3671B incorporates a high-speed ADSL2+ modem and Quality of Service (QoS) especially tuned for VoIP traffic to ensure that voice received through the Internet is the same as or even surpasses that received on the ordinary phone. It supports many useful functions such as call transfer, caller ID display, call hold, call waiting and hot lines to make it convenient to dial out or answer phone calls.

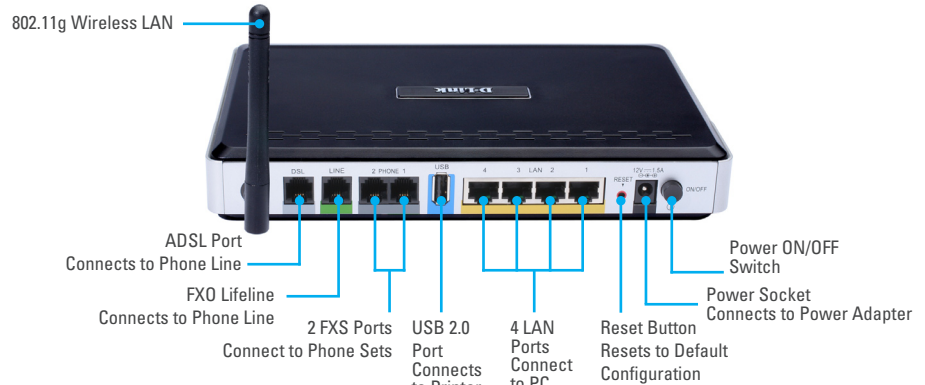

TECHNICAL SPECIFICATIONS

Device Interfaces

- + 1 RJ-11 ADSL port (to phone line)
- + 2 RJ-11 FXS ports (to analog phones)
- + 1 RJ-11 PSTN port (lifeline to phone line)
- + 4 RJ-45 10/100BASE-TX Ethernet LAN ports with auto MDI/MDIX (to computers)
- + 802.11g WLAN (AP wireless connection to computers)
- + 1 USB 2.0 Type B port (to printer)
- + Factory reset button
- + Power ON/OFF switch

ADSL

Standards

- + ADSL standards: Multi-mode, ANSI T1.413 Issue 2, ITU G.992.1 (G.dmt) Annex B, ITU G.992.2 (G.lite) Annex B, ITU G.994.1 (G.hs)
- + ADSL2 standards: ITU G.992.3 (G.dmt.bis) Annex B, ITU G.992.4 (G.lite.bis) Annex B
- + ADSL2+ standards: ITU G.992.5 Annex B

Data Rates

- + G.dmt: 8Mbps downstream, 832Kbps upstream
- + G.lite: 1.5Mbps downstream, 512Kbps upstream
- + ADSL2: 12Mbps downstream, 1Mbps upstream
- + ADSL2+: 24Mbps downstream, 1Mbps upstream

ATM & PPP Protocols

- + ATM Adaptation Layer Type 5 (AAL5)
- + Bridged or routed Ethernet encapsulation
- + VC and LLC based multiplexing
- + PPP over Ethernet (PPPoE)
- + PPP over ATM (RFC 2364)
- + Classical IP over ATM (RFC 1577)
- + OAM F4/F5

VoIP

VoIP Protocol Support

SIP (RFC 3261)

Telephone Function Support

- + DTMF dial tone signal support
- + Caller ID support

Audio Code

- + G.711u-law/A-law
- + G.723.1
- + G.726
- + G.729A/B

Echo Cancellation

G.168

Fax Function Support

Transparent fax (G.711)

VoIP NAT Traversal

SIP

WIRELESS LAN

Standards

- + 802.11g
- + 802.11b

Data Rates

(With automatic fallback)

- + For 802.11g: 54, 48, 36, 24, 18, 12, 9 and 6Mbps
- + For 802.11b: 11, 5.5, 2 and 1Mbps

Wireless Frequency Range

2.4GHz to 2.4835GHz

Antenna

2dBi Gain detachable diversity dipole antenna with reverse SMA connector

Transmit Output Power

16 to 18 dBm

Transmission Technology

DSSS

Data Modulation Type

DBPSK, DQPSK, CCK, PBCC and OFDM (BPSK/QPSK/16-QAM/64-QAM)

Security

- + ACL MAC address filtering
- + ESS-ID
- + 64-, 128-bit WEP data encryption
- + MAC address filtering
- + WPA EAP
- + WPA PSK

ROUTER

Network Protocols & Features

- + NAT/NAPT (RFC 1631)
- + RIP v1 (RFC 1058)
- + RIP v2 (RFC 1389)
- + Static Routing
- + DNS
- + TCP/UDP
- + ARP/RARP (RFC 826)
- + ICMP (RFC 791)
- + DHCP Server/Client (RFC 2131)
- + IP Multicast - IGMP Proxy/Snooping
- + UPnP Compliant
- + Virtual Server/Port Forwarding
- + DMZ
- + SNTP/NTP

Firewall/Access Security

- + Built-in NAT firewall
- + Stateful Packet Inspection (SPI)
- + DoS attacks prevention
- + Packet filtering based on port, source IP address, destination IP address, MAC address (ICMP/TCP/UDP)

Virtual Private Network (VPN)

PPTP/L2TP/IPSec pass-through

QoS

- + ATM QoS
- + PVC/VLAN port mapping QoS for 4 LAN ports
- + Priority queue (3 queues)
- + Packets classification (IP/MAC/Port and physical port)
- + IP TOS

Configuration/Management

- + Quick Installation Wizard
- + Web-based GUI for remote/local management
- + Firmware upgrade, configuration data upload/download via Web-based GUI
- + Telnet server for remote/local management
- + Syslog monitoring
- + SNMP v.1, v.2c support with built-in MIB-I & MIB-II (RFC 1213)
- + TR-069

Security/Bandwidth Management

- + IGMP Snooping
- + PVC/VLAN port mapping

Diagnostic LEDs

- + Power
- + LAN 1 to 4
- + USB
- + WLAN
- + VoIP 1 and 2
- + Line
- + DSL
- + Internet

PHYSICAL & ENVIRONMENTAL

Power Input
Through 12V 1.5A external power adapter

Dimensions
217.5 x 146.5 x 32 mm

Operating Temperature
0° to 40°C

Storage Temperature
-20° to 70°C

Operating Humidity

5% to 95% non-condensing

Emission (EMI)

- + CE

D-Link Worldwide Offices

U.S.A	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Spain	TEL: 34 93 409 0770	FAX: 34 93 491 0795	Iran	TEL: 90-212-289-5659	FAX: 90-212-289-7606
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Portugal	TEL: 351 21 8688493	FAX: 351 21 8622492	Pakistan	TEL: 92-21-454-8158	FAX: 92-21-453-5103
Europe (U. K.)	TEL: 44-20-8955-9000	FAX: 44-20-8955-9001	Greece	TEL: 30 210 9914 512	FAX: 30 210 9916902	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Czech Republic	TEL: 420 224 247 500	FAX: 420 224 234 967	Latin America	TEL: 56-2-5838-950	FAX: 56-2-5838953
France	TEL: 33 1 30 23 86 88	FAX: 33 1 30 23 86 89	Hungary	TEL: 36 (0)1 461 30 00	FAX: 36 (0)1 461 30 04	Brazil	TEL: 55-11-2185-3300	FAX: 55-11-2185-9322
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	Poland	TEL: 48 (0)22 583 92 75	FAX: 48 (0)22 583 92 76	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Belgium & Luxembourg	TEL: 32 (0)2 517 7111	FAX: 32 (0)2 517 6500	Bulgaria	TEL: 359 2 958 22 42	FAX: 359 2 958 65 57	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099
Switzerland	TEL: 41 (0)1 832 11 00	FAX: 41 (0)1 832 11 01	Romania	TEL: 40(0)21 320 23 05	FAX: 40(0)21 320 23 07	Japan	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
Austria	TEL: 43 (0)1 240 27 270	FAX: 43 (0)1 240 27 271	Singapore	TEL: 65-6774-6233	FAX: 65-6774-63225	Korea	TEL: 82-2-890-5491	FAX: 82-2-890-5491
Sweden	TEL: 46 (0)8 564 619 00	FAX: 46 (0)8 564 619 01	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	India	TEL: 91-22-2652 6696	FAX: 91-22-2652 8914	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-3939
Norway	TEL: 47 99 300 100	FAX: 47 22 30 90 85	Middle East (Dubai)	TEL: 971-4-391-6480	FAX: 971-4-390-8881	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898
Finland	TEL: 358-10 309 8840	FAX: 358-10 309 8841	Egypt	TEL: 202-291-9035	FAX: 202-291-9051			
Italy	TEL: 39-02-2900-0876	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-5659	FAX: 90-212-289-7606			